



UNITED STATES PATENT AND TRADEMARK OFFICE

I, Charles Edward SITCH BA,

Managing Director of RWS Group Ltd UK Translation Division, of Europa House, Marsham Way, Gerrards Cross, Buckinghamshire, England declare;

1. That I am a citizen of the United Kingdom of Great Britain and Northern Ireland.
2. That the translator responsible for the attached translation is well acquainted with the German and English languages.
3. That the attached is, to the best of RWS Group Ltd knowledge and belief, a true translation into the English language of the accompanying copy of the specification filed with the application for a patent in Germany on August 1, 2003 under the number DE 103 352 62.7 and the official certificate attached thereto.
4. That I believe that all statements made herein of my own knowledge are true and that all statements made on information and belief are true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the patent application in the United States of America or any patent issuing thereon.

A handwritten signature in black ink, appearing to read "Charles Sitch".

For and on behalf of RWS Group Ltd

The 19th day of February 2008

14.02.2008



DaimlerChrysler AG

Twin clutch transmission with coaxial drive and output

5

The invention relates to a twin clutch transmission according to the preamble of patent claim 1.

10 DE 101 02 028 A1 already discloses a twin clutch transmission, in which the transmission input shaft and the transmission output shaft are arranged coaxially with respect to one another. The countershafts assigned to the two partial transmissions are arranged parallel  
15 to one another.

Furthermore, DE 31 31 156 A1 discloses twin clutch transmissions in which a transmission input shaft and a transmission output shaft are arranged coaxially with  
20 respect to one another. The twin clutch transmission has a plurality of reverse gears in addition to six forward gears.

DE 103 25 647.4, not yet published, shows a twin clutch  
25 transmission, in which, in accordance with the invention:

- a transmission input shaft and a transmission output shaft are arranged coaxially with respect to one another,
- 30 - two countershafts are arranged so as to be offset in parallel with respect to one another and to the transmission input shaft and transmission output shaft,
- a direct gear is provided,
- 35 - otherwise, all the even-numbered forward gears are assigned solely to one countershaft and all the

14.02.2008

odd-numbered forward gears are assigned solely to the other countershaft,

- there being arranged coaxially on the transmission output shaft, offset axially with respect to a shift sleeve assigned to the direct gear and a further forward gear, a further shift sleeve assigned to two forward gears,
- there lying, offset axially with respect to said two shift sleeves, a shift sleeve plane, in which are arranged two further shift sleeves, each of which is assigned in each case to one of the two countershafts.

In contrast to the invention, in this twin clutch transmission, a forward gear runs via four gear ratio stages.

The object of the invention is to provide a twin clutch transmission, compact in every dimension, for a vehicle with an engine installed longitudinally in the direction of travel, said twin clutch transmission having high efficiency.

Twin clutch transmissions with a coaxial input shaft and transmission output shaft may be used in an especially advantageous way in connection with a longitudinally installed engine. Drivetrains with a longitudinally installed engine have the advantage that these can be installed in vehicles with high torques.

The transmission is mostly followed by a cardan shaft which transfers the drive torque to a rear axle via a rear axle transmission. In commercial vehicles and passenger cars with four-wheel drive, the drive torque is optionally transferred from the composite longitudinal engine/transmission structure to at least one further vehicle axle via a power divider. The twin clutch transmission according to the invention is

14.02.2008

consequently employed primarily in passenger cars of the luxury class and in commercial vehicles.

5 The coaxial type of construction of the transmission input shaft and transmission output shaft makes it possible in an especially advantageous way, depending on the customer's wishes, to equip the vehicles alternatively with the twin clutch transmission according to the invention or with an epicyclic  
10 automatic transmission, the input and output shafts of which lie coaxially as a consequence of the principle involved. Consequently, in an especially advantageous way, the diversity of parts in the vehicle variants can be kept low.

15 A further advantage of the invention arises from the arrangement of the two countershafts which is offset in parallel and which makes it possible to have an axially shorter type of construction of the transmission than  
20 the coaxial type of construction of the two countershafts, as is shown, for example, in EP 1 141 580 A1. Thus, in spite of the additional clutch, the twin clutch transmission according to the invention has as axial build no longer than a manual  
25 shift transmission with only one starting and shift clutch. It is even possible to build the twin clutch transmission, which has the advantage of power shiftability, as compared with the manual shift transmission, so that it is just as short as or even  
30 shorter than a manual shift transmission with the same number of forward gears and nevertheless to provide additional reverse gears, this being advantageous particularly in the case of commercial vehicles. Furthermore, there is a possibility, when fundamentally  
35 the same basic transmission is used, depending on the customer's wishes, optionally to equip some twin clutch transmissions with one reverse gear and the rest of the

14.02.2008

twin clutch transmissions with a plurality of reverse gears. This modular system affords cost benefits.

Particularly in comparison with twin clutch transmissions having countershafts which are offset in parallel and are arranged coaxially with respect to the respective clutch, as shown, for example, in DE 199 39 334 A1 or in DE 101 02 028 A1, fig. 12, the invention affords the advantage of a narrow type of construction of the transmission. Consequently, in contrast to the twin clutch transmission according to DE 199 39 334 A1, the twin clutch transmission according to invention can be employed in an especially advantageous way in vehicles with narrow vehicle tunnels or with low ground clearance.

As compared with other twin clutch transmissions of relatively compact build with a coaxial transmission input and transmission output, such as is shown, for example, in DE 101 02 028 A1, fig. 1, the twin clutch transmission according to the invention has a direct gear. This may be of a load-shiftable type in an especially advantageous way. Since toothing engagements for torque transfer are dispensed with, the direct gear has especially high efficiency. In the twin clutch transmission according to the invention, the efficiency is even higher, since the force flux of the remaining forward gears runs only via two toothing pairings.

In an especially advantageous way, at least one reverse gear can run via both countershafts. Construction space can thus be saved. A plurality of reverse gears can be implemented at only low to no additional outlay in terms of construction space.

35

The arrangement according to the invention of the shift sleeves makes it possible in an especially advantageous

14.02.2008

way, in the case of an optimal utilization of four shift sleeves, to have seven forward gears and at least two reverse gears. Furthermore, the offset arrangement, stated in patent claim 1, of the four shift sleeves  
5 further allows a compact construction of the twin clutch transmission both in the axial direction and transversely thereto.

The twin clutch transmission according to the invention  
10 may in an especially advantageous way be staged progressively or at least approximately progressively.

In an especially advantageous way, all the forward gears may be of the sequentially power-shiftable type.  
15 Depending on the design of the wheel set, the changeover between the first forward gear and the first reverse gear may take place solely by the alternate closing of the two clutches of the twin clutch transmission, without a shift sleeve having to be  
20 actuated in this case. This is especially favorable with regard to short transition times from the reverse gear into the first forward gear, which are advantageous not only for maneuvering, but also, for example, for a "rocking" of the stuck vehicle. During  
25 the "rocking cycle", the vehicle is driven briefly forward and backward, in order by momentum to escape, for example, from a sandpit. The inertia of the vehicle mass and load mass is consequently utilized in order to assist possibly poorly gripping drive of the driving  
30 wheels. In this respect, a twin clutch transmission proves to be especially advantageous, since it can be designed to be fully automatic. Even a fully automatic "rocking mode" can consequently be provided. In addition, as well as the fully automatic operating  
35 mode, the semiautomatic operating mode may also be provided, in which the gear change is predetermined directly by the vehicle driver. This gear change is

14.02.2008

executed automatically when corresponding boundary conditions are fulfilled. These boundary conditions are, for example,

- adherence to the maximum and the minimum permissible engine rotational speed,
- a vehicle stability program, such as, for example, an electronic stability program ESP or an antilock system ABS or a traction control ASR, is inactive.

10 In an especially advantageous way, in each case, at least one gearwheel may be doubly occupied. That is to say, the gearwheel is in the active torque path in at least two gear stages.

15 A reversing shaft, by means of which the direction of rotation is reversed for reverse gear, may in an especially advantageous way carry a plurality of, in particular two, gearwheels. These gearwheels may be designed, in particular, as fixed wheels.

20 Further advantage of the invention may be gathered from the further patent claims, the description and the drawing.

25 The invention is illustrated below, with reference to three exemplary embodiments, in the drawing in which:

- fig. 1 shows diagrammatically a transmission diagram of a twin clutch transmission in a first embodiment of the invention,
- 30 fig. 2 shows a table of the shift states of the clutches and shift sleeves of the twin clutch transmission according to fig. 1,
- fig. 3 shows diagrammatically a transmission diagram of a twin clutch transmission in a second embodiment of the invention,
- 35

fig. 4 shows a table of the shift states of the clutches and shift sleeves of the twin clutch transmission according to fig. 3,

5 fig. 5 shows diagrammatically a transmission diagram of a twin clutch transmission in a third embodiment of the invention, and

fig. 6 shows a table of the shift states of the clutches and shift sleeves of the twin clutch transmission according to fig. 5.

10

A twin clutch transmission 10 according to the invention, as shown in fig. 1, is used in a drivetrain of a motor vehicle. In this case, the twin clutch transmission 10 is interposed between an engine and an  
15 output shaft, for example a propeller shaft or cardan shaft. This is preferably a standard drivetrain with an engine which is arranged in a front longitudinal mounting, and with a rear drive. The preferred embodiment of the invention also includes a multi-axle  
20 drive. This multi-axle drive may be designed with a side shaft led to the front axle, that is known, for example, from EP 1 321 327 A2. Furthermore, the multi-axle drive may be designed with a through-drive axle, as is known from heavy commercial vehicles.

25

The twin clutch transmission has an input shaft 11,

- in particular a crankshaft or
- a shaft rotating with the latter or
- a two mass flywheel or
- 30 - a flexible dog plate,

and a transmission output shaft 12. The input shaft 11 and transmission output shaft 12 are arranged coaxially with respect to a transmission axis X-X. The input shaft 11 is connected to the engine, if appropriate  
35 with at least one further transmission stage interposed. The transmission output shaft 12 is

14.02.2008

connected to vehicle wheels, if appropriate with at least one further transmission stage interposed.

The expressions:

- 5     -     "front" and "rear",
  - "first to seventh gearwheel plane" and
  - "upper countershaft" and "lower countershaft"
- are used below.

10    "Front" is in this case the direction pointing forward when the motor vehicle is in forward drive, whereas "rear" is correspondingly the opposite direction. In the drawing, "front" is illustrated on the left and "rear" on the right.

15    The "first to seventh gearwheel plane" counts in this case from front to rear.

      A gearwheel plane is a plane in which at least two  
20    intermeshing gearwheels are arranged. In the practical implementation of the transmission diagrams illustrated, it may be, particularly in the situation where three gearwheels intermesh in a gearwheel plane, that the gearwheels are not arranged exactly in one  
25    plane for reasons of construction space or of dimensioning. Such a reason would be, for example, different tooth widths on the two countershafts, which are due to different torques to be transferred.

30    The expression "shift sleeve plane" used in connection with the invention means, here, that at least one shift sleeve is located in one plane. In the practical implementation of the transmission diagrams illustrated, it may be, particularly in the situation  
35    where at least two shift sleeves are located in one shift sleeve plane, that the shift sleeves are not arranged exactly in one plane for reasons of

construction space. The construction space may be predetermined, for example, by the installation position of a shift actuator assembly for the displacement of the shift sleeves for the purpose of a gear change.

The use of the expressions "upper countershaft" and "lower countershaft" serves merely as a guideline in the drawing and is not to be interpreted as restricting the scope of protection. The arrangement of the three shafts parallel to one another:

- input shaft and
- two countershafts

may in this case take place three-dimensionally in a triangle or else in one plane.

The input shaft 11 is drive-connected to a twin clutch 13, designed here as a structural unit. The twin clutch 13 has a clutch K1 and a clutch K2 which, via suitable devices, not illustrated, and so as to ensure a suitable overlap control, transfer the drive torque of the input shaft 11 to an intermediate shaft 14 for a closed clutch K2 and to an intermediate shaft 15 for a closed clutch K1. The clutch K1 is arranged, in the direction of the transmission axis X-X ("in the axial direction" below), on that side of the clutch K2 which faces away from the engine. The intermediate shaft 14 is designed as a hollow shaft and is penetrated radially on the inside by the intermediate shaft 15. In that end region of the intermediate shaft 14 which faces away from the twin clutch 13, the transfer of the drive torque from the intermediate shaft 14 to a countershaft 16 takes place via a constant C1 which forms an input gear ratio and which has a driving gearwheel 18 connected fixedly in terms of rotation to the intermediate shaft 14 and a driven gearwheel 19 connected fixedly in terms of rotation to the

14.02.2008

countershaft 16. The driving gearwheel 18 and the driven gearwheel 19 lie in a first gearwheel plane ZE1.

A fixed wheel 20 of a forward gear stage G1 and a fixed  
5 wheel 21 of a forward gear stage G5 are connected  
fixedly in terms of rotation to the countershaft 16.  
The fixed wheel 20 meshes, in a seventh gearwheel plane  
ZE7, with a loose wheel 22 which is arranged coaxially  
on the transmission output shaft 12. The fixed wheel 21  
10 meshes, in a sixth gearwheel plane ZE6, with a loose  
wheel 23 which is arranged coaxially on the  
transmission output shaft 12 and axially adjacently in  
front of the loose wheel 22. Arranged axially between  
the two loose wheels 22 and 23 is a first shift sleeve  
15 24 which can be pushed axially forward into a position  
S7, so that it makes a rotationally fixed connection  
between the loose wheel 23 and the transmission output  
shaft 12. By contrast, when the first shift sleeve 24  
is pushed rearward into a position S8, the shift sleeve  
20 24 makes a rotationally fixed connection between the  
loose wheel 22 and the transmission output shaft 12.

A loose wheel 25 also lies in the sixth gearwheel plane  
ZE6, which lies coaxially on the lower countershaft 33  
25 and is assigned to three reverse gears R1, R2 and R3.  
This loose wheel 25 meshes with the loose wheel 23 via  
an intermediate wheel, not illustrated in any more  
detail, which is located in the sixth gearwheel plane  
ZE6.

30  
A loose wheel 26 assigned to the fourth forward gear G4  
lies, axially adjacently in front of the loose wheel  
25, in a fourth gearwheel plane ZE4. This loose wheel  
26 meshes with fixed wheel 27 which is connected  
35 fixedly in terms of rotation to the transmission output  
shaft 12 in the fourth gearwheel plane ZE4. Arranged  
axially between the two loose wheels 25 and 26 is a

14.02.2008

second shift sleeve 28 which can be pushed axially forward into a position S5, so that it makes a rotationally fixed connection between the loose wheel 26 and the countershaft 33. By contrast, when the  
5 second shift sleeve 28 is pushed axially rearward into a position S6, the shift sleeve 28 makes a rotationally fixed connection between the loose wheel 25 and the lower countershaft 33.

10 The fourth forward gear G4 is also arranged in said fourth gearwheel plane ZE4 assigned to the third forward gear G3. In this case, a loose wheel 29 assigned to the third forward gear G3 meshes with the fixed wheel 27 on the transmission output shaft 12. The  
15 loose wheel 30 lies axially adjacently behind this loose wheel 29, and is assigned to the seventh forward gear G7 and lies in a fifth gearwheel plane ZE5. This loose wheel 30 meshes with a loose wheel 31 likewise lying in the fifth gearwheel plane ZE5. A third shift  
20 sleeve 32 lies axially between the loose wheel 29 and the third forward gear G3 and the loose wheel 30 of the seventh forward gear. The shift sleeve 32 can be pushed forward into a position S3, so that it makes a rotationally fixed connection between the loose wheel  
25 29 and the countershaft 16. By contrast, when the third shift sleeve 32 is pushed axially rearward into a position S4, the shift sleeve 32 makes a rotationally fixed connection between the loose wheel 30 and the countershaft 16.

30

Since room for the fifth gearwheel plane ZE5 therefore also has to be reserved in the axial construction space between the loose wheel 25 of the three reverse gears R1, R2, R3 and the loose wheel 26 of the fourth forward  
35 gear G4, in addition to the second shift sleeve 28, loose wheel 25 has an annular extension 34 for its shift toothing 35.

14.02.2008

The second gearwheel plane ZE2 of the second transmission constant C2 lies axially in front of the third gearwheel plane ZE3. This second transmission constant C2 comprises:

- a driving gearwheel 36 which is connected fixedly in terms of rotation to the rear end of the intermediate shaft 15, and
- a driven gearwheel 37 which is arranged fixedly in terms of rotation at the front end of the countershaft 33.

Axially between the driving gearwheel 36 of the second transmission constant C2 and the loose wheel of the second gear G2 lies the direct gear G6, the gear ratio 1:1 of which lies between the gear ratio of the fifth gear G5 and the gear ratio of the seventh gear G7. The transmission output shaft 12 is mounted rotatably in a central bore of the intermediate shaft 15 at a location in front of the direct gear G6. The transmission output shaft 12 is thus rotatable with respect to the intermediate shaft 15 as long as a shift sleeve 38 of the direct gear G6 is not in a front position S1. In this front position S1, the shift sleeve 38 makes a rotationally fixed connection between the intermediate shaft 15 and the transmission output shaft 12.

In a rear position S2, the shift sleeve 38 makes a rotationally fixed connection between the transmission output shaft 12 and a loose wheel 39 which is mounted coaxially with respect to the transmission output shaft. This loose wheel 39 is arranged in the third gearwheel plane ZE3 and meshes with a fixed wheel 40 which is assigned to the second forward gear G2 and which is connected fixedly in terms of rotation to the countershaft 33.

14.02.2008

Thus, in the gearwheel and shift element planes which are oriented transversely ("radially" below) with respect to the transmission axis X-X, are arranged in the following order, one behind the other axially from the front to the rear:

- in a first gearwheel plane ZE1, the transmission constant C1 assigned to the first clutch K1 and having the driving gearwheel 18 and driven gearwheel 19,
- 10 - in a second gearwheel plane ZE2, the second transmission constant C2 assigned to the second clutch K2 and having the driving gearwheel 36 and driven gearwheel 37,
- in the first shift sleeve plane, the shift element  
15 38 of the direct gear G6 and of the second forward gear G2,
- in the third gearwheel plane ZE3, the gearwheels of the second forward gear G2,
- in the fourth gearwheel plane ZE4, the gearwheels  
20 of the third forward gear G3 and of the fourth forward gear G4,
- in the second shift sleeve plane, the two shift sleeves 28, 32 which are arranged on the countershafts 33, 16 and which are assigned to the  
25 forward gears G4, G3, G7 and to the reverse gears R1, R2, R3,
- in the fifth gearwheel plane ZE5, the two gearwheels of the seventh forward gear G7,
- in the sixth gearwheel plane ZE6, the gearwheels  
30 of the fifth forward gear G5 and of the three reverse gears R1, R2 and R3,
- in the third shift sleeve plane, a shift sleeve 24 of the fifth transmission gear G5, the three reverse gears R1, R2 and R3 and the first  
35 transmission gear G1, and
- in the seventh gearwheel plane ZE7, the gearwheels for the seventh gear.

Fig. 2 shows a table of the shift states of the two clutches K1, K2 and four shift elements 38, 32, 28, 24 of the twin clutch transmission 10 according fig. 1.

5

In the first forward gear G1, the torque path runs via the engaged first clutch K1. The second clutch K2 is disengaged. The shift sleeve 24 is located in the rear position S8. All the other shift sleeves are located in a neutral position N.

10

In the second forward gear G2, the torque path runs via the engaged second clutch K2. The first clutch K1 is disengaged. The shift sleeve 38 is located in the rear position S2. All the other shift sleeves are located in a neutral position N.

15

In the third forward gear G3, the torque path runs via the engaged first clutch K1. The second clutch K2 is disengaged. The shift sleeve 32 is located in the front position S3. All the other shift sleeves are located in a neutral position N.

20

In the fourth forward gear G4, the torque path runs via the engaged second clutch K2. The first clutch K1 is disengaged. The shift sleeve 28 is located in the front position S5. All the other shift sleeves are located in a neutral position N.

25

In the fifth forward gear G5, the torque path runs via the engaged first clutch K1. The second clutch K2 is disengaged. The shift sleeve 24 is located in the front position S7. All the other shift sleeves are located in a neutral position N.

30

35

In the sixth forward gear G6, the torque path runs via the engaged second clutch K2. The first clutch K1 is

14.02.2008

disengaged. The shift sleeve 38 is located in the front position S1. All the other shift sleeves are located in a neutral position N.

5 In the seventh forward gear G7, the torque path runs via the engaged first clutch K1. The second clutch K2 is disengaged. The shift sleeve 32 is located in the rear position S4. All the other shift sleeves are located in a neutral position N.

10

In the first reverse gear R1, the torque path runs via the engaged first clutch K1. The second clutch K2 is disengaged. The shift sleeve 38 is located in the rear position S2. The shift sleeve 28 is located in the rear position S6. The other two shift sleeves are located in a neutral position N.

15

In the second reverse gear R2, the torque path runs via the engaged second clutch K2. The first clutch K1 is disengaged. The shift sleeve 24 is located in the rear position S8. The shift sleeve 28 is located in the rear position S6. The other two shift sleeves are located in a neutral position N.

20

25 In the third reverse gear R3, the torque path runs via the engaged second clutch K2. The first clutch K1 is disengaged. The shift sleeve 32 is located in the front position S3. The shift sleeve 28 is located in the rear position S6. The other two shift sleeves are located in a neutral position N.

30

Thus, in this transmission diagram, up shifts and down shifts can take place sequentially between the seven forward gears G1 to G7 without any interruption in traction.

35

14.02.2008

Fig. 3 shows diagrammatically a transmission diagram of a twin clutch transmission in a second embodiment. Only the differences from the first embodiment are described below, since these relate merely to the reverse gears  
5 R1, R2 and R3.

In the first reverse gear R1, the torque path runs solely via a lower countershaft 33, whereas, in the second and the third reverse gear R2 and R3, the torque  
10 path runs via both countershafts 16, 33.

For this purpose, instead of the intermediate wheel according to the first embodiment which is assigned to the reverse gear, a reversing shaft 41 is provided,  
15 which lies offset in parallel to the transmission output shaft 12 and to the two countershafts 16, 33. This reversing shaft 41 carries two gearwheels 42, 43 spaced apart axially. The front larger gearwheel 42 meshes in the sixth gearwheel plane ZE6, on the one  
20 hand, with the loose wheel 25 and, on the other hand, with the loose wheel 23. The rear smaller gearwheel 43 meshes only with the loose wheel 22 lying in the seventh gearwheel plane ZE7.

25 The first reverse gear R1, in its torque path, runs basically in a similar way to the torque path of the second reverse gear R2 of the first embodiment according to fig. 1 and fig. 2. That is to say, in the first reverse gear R1, the second clutch K2 is engaged  
30 and the first clutch K1 is disengaged. The shift sleeve 24 is located in the rear position S8. The shift sleeve 28 is located in the rear position S6. The other two shift sleeves are located in a neutral position N. The torque path consequently runs via  
35 - the clutch K2,

- the second gearwheel plane ZE2 of the second transmission constant C2 having a driving gearwheel 36 and the driven gearwheel 37,
  - the shift sleeve 28,
  - 5 - the loose wheel 25,
  - the gearwheel 42,
  - the gearwheel 43 and
  - the loose wheel 22
- to the transmission output shaft 12.

10

In the second reverse gear R2, the first clutch K1 is engaged and the second clutch K2 is disengaged. The shift sleeve 38 is located in the rear position S2. The shift sleeve 28 is located in the rear position S6. The

15 other two shift sleeves are located in a neutral position N. The torque path consequently runs via

- the first clutch K1 and
  - the first gearwheel plane ZE1 of the first transmission constant C1 having the driving
  - 20 gearwheel 18 and the driven gearwheel 19
- to the countershaft 16.

The torque path runs via the fixed wheel 20 to the loose wheel 22 and the rear gearwheel 43 of the

25 reversing shaft 41.

- The torque path runs from the gearwheel 42 via
- the loose wheel 25,
  - the shift sleeve 28,
  - 30 - the countershaft 33,
  - the fixed wheel 40,
  - the loose wheel 39 and
  - the shift sleeve 38
- to the transmission output shaft 12.

35

In the third reverse gear R3, the second clutch K2 is engaged and the first clutch K1 is disengaged. The

14.02.2008

shift sleeve 32 is located in the front position S3. The shift sleeve 28 is located in the rear position S6. The other two shift sleeves are located in a neutral position N. The torque path consequently runs via

- 5 - the second clutch K2 and
- the second gearwheel plane ZE2 of the second transmission constant C2 having the driving gearwheel 36 and the driven gearwheel 37

to the countershaft 33. The torque path subsequently runs via the shift sleeve 28 in the position S6 to the loose wheel 25 and to the gearwheel 42 meshing with the latter. The torque path runs from here via

- the reversing shaft 41,
- the smaller gearwheel 43,
- 15 - the loose wheel 22,
- the fixed wheel 20,
- the upper countershaft 16,
- the shift element 32,
- the loose wheel 29,
- 20 - the fixed wheel 27

to the transmission output shaft 12.

Fig. 5 shows diagrammatically a transmission diagram of a twin clutch transmission in a third embodiment. Only the differences from the second embodiment according to fig. 3 are described below.

These differences relate, on the one hand, to the two interchanged clutches K1 and K2, so that, in this case, the clutch K1 is connected to the radially inner intermediate shaft 15, its driving gearwheel 36 being smaller than the driving gearwheel 18 of the intermediate shaft 14 which is connected to the second clutch K2. The small driving gearwheel 36 belongs in this case to the first transmission constant C1, whereas the large driving gearwheel 18 belongs to the second transmission constant C2.

A further differentiating feature with regard to the second and the first embodiment according to fig. 3 and fig. 1 is that a fixed wheel 21 arranged on a countershaft in the sixth gearwheel plane ZE6 is not  
5 arranged on the upper countershaft 16, but, instead, on the lower countershaft 33. Consequently, however, the fixed wheel 21 of the sixth gearwheel plane ZE6 is arranged, in a similar way to the first and the second  
10 embodiment, on the countershaft which meshes directly with the intermediate shaft 14 designed as a hollow shaft. The fixed wheel 21 of the sixth gearwheel plane ZE6 is not assigned to the fifth forward gear G5, however, but to the sixth forward gear G6. Thus, in  
15 this third embodiment, the fifth forward gear G5 is the direct gear. Since the reversing shaft 41 likewise meshes with a loose wheel 25 of the lower countershaft 33 according to the other two embodiments, the displacement of the fixed wheel 21 onto the lower  
20 countershaft entails a reversing shaft 41 which is longer than that of the first two embodiments.

According to the third embodiment, 2 reverse gears R1 and R2 are provided.

25

Fig. 6 shows a table of the shift states of the clutches K1, K2 and shift elements 38, 32, 28, 24 of the twin clutch transmission 10 according to fig. 5.

30 In the first forward gear G1, the torque path runs via the engaged first clutch K1. The second clutch K2 is disengaged. The shift sleeve 24 is located in the rear position S8. All the other shift sleeves are located in a neutral position N.

35

In the second forward gear G2, the torque path runs via the engaged second clutch K2. The first clutch K1 is

disengaged. The shift sleeve 38 is located in the rear position S2. All the other shift sleeves are located in a neutral position N.

5 In the third forward gear G3, the torque path runs via the engaged first clutch K1. The second clutch K2 is disengaged. The shift sleeve 32 is located in the front position S3. All the other shift sleeves are located in a neutral position N.

10

In the fourth forward gear G4, the torque path runs via the engaged second clutch K2. The first clutch K1 is disengaged. The shift sleeve 28 is located in the front position S5. All the other shift sleeves are located in a neutral position N.

15

In the fifth forward gear G5, the torque path runs via the engaged first clutch K1. The second clutch K2 is disengaged. The shift sleeve 38 is located in the front position S1. The intermediate shaft 15 or the input shaft 11 is consequently connected fixedly in terms of rotation to the transmission output shaft 12 via the direct gear. All the other shift sleeves are located in a neutral position N.

20

25

In the sixth forward gear G6, the torque path runs via the engaged second clutch K2. The first clutch K1 is disengaged. The shift sleeve 24 is located in the front position S7. All the other shift sleeves are located in a neutral position N.

30

In the seventh forward gear G7, the torque path runs via the engaged first clutch K1. The second clutch K2 is disengaged. The shift sleeve 32 is located in the rear position S4. All the other shift sleeves are located in a neutral position N.

35

14.02.2008

In the first reverse gear R1, the torque path runs via the engaged first clutch K1. The second clutch K2 is disengaged. The shift sleeve 24 is located in the rear position S8. The shift sleeve 28 is located in the rear position S6. The other two shift sleeves are located in a neutral position N.

In the second reverse gear R2, the torque path runs via the engaged second clutch K2. The first clutch K1 is disengaged. The shift sleeve 32 is located in the front position S3. The shift sleeve 28 is located in the rear position S6. The other two shift sleeves are located in a neutral position N.

Thus, in this transmission diagram, shifts can take place sequentially between the forward gears without any interruption in traction. The second reverse gear R2 may be assigned, in particular, to a winter driving program, so that, if there is poor ground adhesion, there is a shift to a lower reversing drive torque in the second reverse gear R2 without any interruption in traction. Furthermore, the second reverse gear R2 may be used in order to achieve higher reversing speeds than in the first reverse gear R1.

To implement the reverse gears, it is necessary, in a transmission according to fig. 1, that a power flow can take place from the fixed wheel 21 to the loose wheel 25, or vice versa. For this purpose, these two gearwheels 21, 25 may mesh directly with one another, which presupposes that the respective shafts 16, 12, 33 are positioned with respect to one another in the triangular arrangement already explained above. Furthermore, it is possible to connect said gearwheels 21 and 25 via the loose wheel 23 and an intermediate gearwheel, not illustrated here. In this case, it is

14.02.2008

possible to position the shafts 11, 12, 16 and 33 both in one plane and in said triangular arrangement.

The number  $s$  of the (minimum) required shift units for  
5 a compact configuration according to the invention is calculated from a number  $n$  of forward gears according to the following principle:

if  $n$  is an odd number, then  
10  $s = (n + 1)/2$ ,  
if  $n$  is an even number, then  
 $s = (n+2)/2$ .

The shaft axes illustrated may be arranged in one plane  
15 or else in a three-dimensional arrangement, in particular in a triangular arrangement.

The shift sleeve may be designed in all the embodiments both as a synchronizing device and as a dog clutch.

20 The twin clutch transmission may alternatively also be designed with a single reverse gear.

The shift sleeves may be designed for shifting both via  
25 shift forks and shift rockers or else also directly by means of a coaxial shift actuator assembly, as is known, for example, from DE 101 03 664 A1.

Said shift actuator assembly for shift forks or shift  
30 rockers may be designed as a shift roller with grooves, as is known from motorcycles, or may be designed with an x-y actuator which introduces a rotational and translational movement into a shift shaft, a shift finger or one of a plurality of parallel shift rails.

35 The embodiments described are merely exemplary embodiments. A combination of the features described

14.02.2008

for different embodiments is likewise possible. Further features, in particular not described, of the device parts belonging to the invention may be gathered from the geometries, illustrated in the drawings, of the

5 device parts.

14.02.2008

DaimlerChrysler AG

Patent claims

5

1. A twin clutch transmission (10), in which
- a transmission input shaft (11) and a transmission output shaft (12) are arranged coaxially with respect to one another, and
  - two countershafts (16, 33) are arranged, offset in parallel with respect to one another and to the transmission input shaft (11) and transmission output shaft (12),
- 15 characterized
- in that a direct gear is provided, and otherwise
- all the even-numbered forward gears are assigned solely to one countershaft (33), and
  - all the odd-numbered forward gears are assigned
- 20 solely to the other countershaft (16),
- and there being arranged coaxially on the transmission output shaft (12), offset axially with respect to a shift sleeve (38) assigned to the direct gear and to a further forward gear, a further shift sleeve (24)
- 25 assigned to two forward gears, and there lying, offset axially with respect to said two shift sleeves (38, 24), a shift sleeve plane in which are arranged two further shift sleeves (32, 28), each of which is assigned in each case to one of the two countershafts
- 30 (33, 16), each forward gear, with the exception of the direct gear, taking place via two gearwheel stages.

2. The twin clutch transmission as claimed in patent claim 1, characterized in that the twin clutch
- 35 transmission (10) is installed in a motor vehicle having an engine arranged longitudinally in the direction of travel and has

- n sequentially power-shiftable forward gears,  
- two intermediate shafts (14, 15) which are  
arranged coaxially with respect to one another and  
one of which is designed as a hollow shaft (14),  
5 and  
- two friction clutches (K1, K2) arranged  
concentrically with respect to the intermediate  
shafts (14, 15),  
all the forward gears being actuated in each case by  
10 the selection of a single shift sleeve assigned to the  
respective forward gear, and one of these forward gears  
being designed as a direct gear.

3. The twin clutch transmission as claimed in patent  
15 claim 2, characterized in that the direct gear is  
designed as forward gear n, n-1 or n-2.

4. The twin clutch transmission as claimed in one of  
the preceding patent claims, characterized in that the  
20 reversal of direction of rotation in the reversing mode  
is implemented by means of an additional intermediate  
wheel.

5. The twin clutch transmission as claimed in one of  
25 patent claims 1 to 3, characterized in that the  
reversal of direction of rotation in the reversing mode  
is implemented by means of an additional intermediate  
shaft (41).

30 6. The twin clutch transmission as claimed in one of  
patent claims 1 to 3, characterized in that the  
reversal of direction of rotation in the reversing mode  
is implemented solely by means of gearwheels which are  
arranged coaxially with respect to the input and the  
35 output shaft or to the two countershafts.

7. The twin clutch transmission as claimed in one of the preceding patent claims, characterized in that the number  $s$  of the shift sleeves mounted in the twin clutch transmission is calculated from the number  $n$  of forward gears, for an odd number  $n$  from:

$$s = \frac{n+1}{2},$$

and, for an even number  $n$ , from:

$$s = \frac{n+2}{2}$$

8. The twin clutch transmission as claimed in one of the preceding patent claims, characterized in that the two countershafts (16, 33) and the input shaft (11) lie at least approximately in one plane.

9. The twin clutch transmission as claimed in one of the preceding patent claims, characterized in that the two countershafts (16, 33) and the input shaft (11) are arranged in triangular form.

10. The twin clutch transmission as claimed in one of the preceding patent claims, characterized in that at least one gearwheel lies in different gear stages in the torque path.

11. The twin clutch transmission as claimed in one of the preceding patent claims, characterized in that the first forward gear (G1) and a reverse gear (R1) are arranged in such a way that, for alternately shifting back and forth between the first forward gear and this reverse gear ("rocking cycle"), only an alternate actuation of the input-side clutches (K1 and K2), without the actuation of the shift sleeve, is required.

14.02.2008

12. The twin clutch transmission as claimed in patent claim 11, characterized in that this said reverse gear for alternately shifting back and forth with the first forward gear is the first reverse gear (R1).

5

13. The twin clutch transmission as claimed in one of the preceding patent claims, characterized in that in each case a shift sleeve arranged on a countershaft and a shift sleeve arranged coaxially with respect to the main shaft have exactly or approximately the same position with respect to the longitudinal direction of the transmission.

10

DaimlerChrysler AG

Abstract

The invention relates to a twin clutch transmission of high efficiency which is compact in every dimension. This twin clutch transmission can be used particularly in vehicles having a longitudinally installed engine. For this purpose, the transmission input shaft and the transmission output shaft are arranged coaxially with respect to one another, whereas the two countershafts are arranged parallel to one another. Furthermore, the shift sleeves are arranged in a special way, thus making seven forward gears and a plurality of reverse gears possible.

(Fig. 1)

Fig. 1

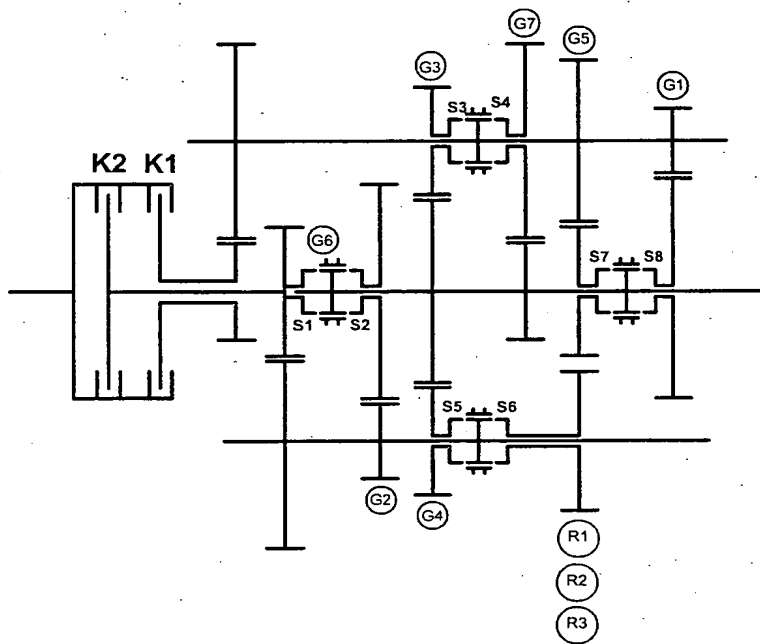


Fig. 2

	K1	K2	S1	N	S2	S3	N	S4	S5	N	S6	S7	N	S8
R3		●		⊕		●					●		⊕	
R2		●		⊕			⊕				●			●
R1	●				●		⊕				●		⊕	
G1	●			⊕			⊕			⊕				●
G2		●			●		⊕			⊕			⊕	
G3	●			⊕		●				⊕			⊕	
G4		●		⊕			⊕		●				⊕	
G5	●			⊕			⊕			⊕		●		
G6		●	●				⊕			⊕			⊕	
G7	●			⊕				●		⊕			⊕	

Fig. 3

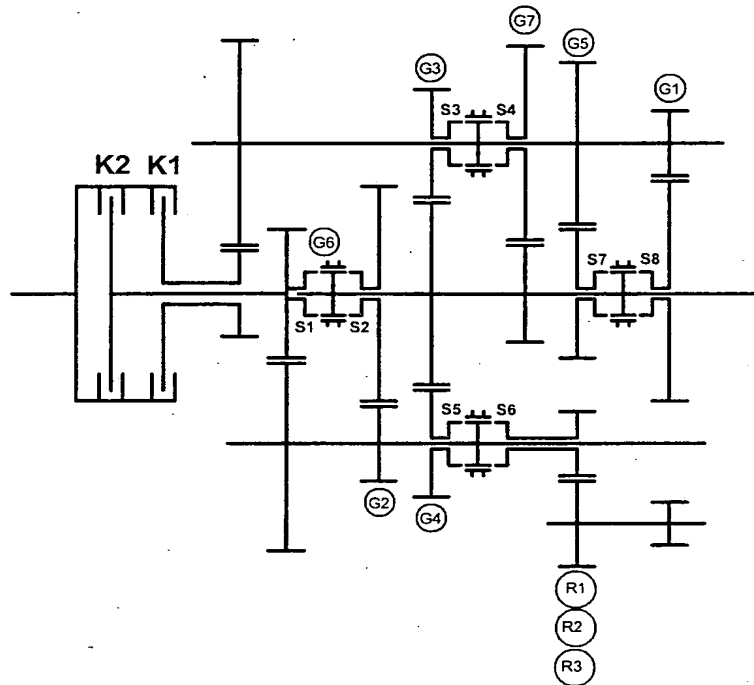


Fig. 4

	K1	K2	S1	N	S2	S3	N	S4	S5	N	S6	S7	N	S8
R3		●		⊗		●					●		⊗	
R2	●				●		⊗				●		⊗	
R1		●		⊗			⊗				●			●
G1	●			⊗			⊗			⊗				●
G2		●			●		⊗			⊗			⊗	
G3	●			⊗		●				⊗			⊗	
G4		●		⊗			⊗		●				⊗	
G5	●			⊗			⊗			⊗		●		
G6		●	●				⊗			⊗			⊗	
G7	●			⊗				●		⊗			⊗	

Fig. 5

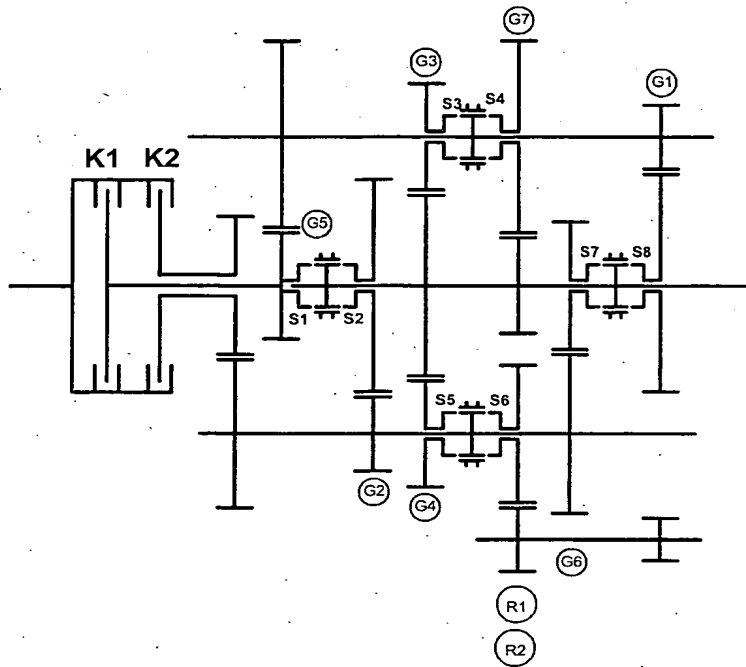


Fig. 6

	K1	K2	S1	N	S2	S3	N	S4	S5	N	S6	S7	N	S8
R2		●		⊗		●					●		⊗	
R1	●			⊗			⊗				●			●
G1	●			⊗			⊗			⊗				●
G2		●			●		⊗			⊗			⊗	
G3	●			⊗		●				⊗			⊗	
G4		●		⊗			⊗		●				⊗	
G5	●		●				⊗			⊗			⊗	
G6		●		⊗			⊗			⊗		●		
G7	●			⊗				●		⊗			⊗	